

FLEXSTAKE™

The Mow-Over Marker That Can Walk on Water and be Cross-Cut on a Fairway



Floating FlexStake


This is the ultimate in mow-over course marking stakes. Two O-style rings on hinge seals dirt and water out of anchor. Sealed stake floats if thrown in water hazard. Suitable for all course markings. Can be mowed over by reel-type or rotary mowers. Above ground post is rugged, two chamber, color-impregnated, UV stabilized, polycarbonate extrusion. Above-ground heights of 17.5", 24" and 36".

FlexAnchor

Hi-visibility surface ring sheds water and dirt. Anchor for all standard FlexStake hazard, glo and fence posts. Established correct location for markers in intermittent use. Aligning grooves automatically lock anchor in place. "Wipe fit" keeps dirt and water out of anchor.

FlexGlo

Reusable traffic control markers, highly visible and cost effective. Appears to be fixed barrier, but can be run over by any road vehicle. Excellent for parking lots or as barricade that allows passage of official vehicles. Reflective tops for directing night traffic or parking. Above ground heights of 2', 3' and 4'.

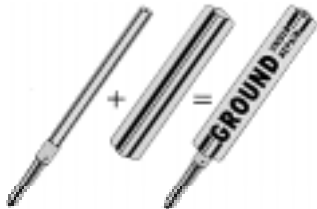


Kwik Sign

Slip any of the standard decals over regular hazard marker and turn it into a large, 3" wide, hi-visibility sign, yardage or OB marker. Available in Red, Orange, Green, Yellow, Blue, Brown, Gray, White.

Anchor Puller

To un-install or raise FlexAnchors. We recommend all anchors be pulled above surrounding grass and stepped back in at least once a year. This puts overgrowing grass under the anchor face plate and eliminates the need for herbicides around your FlexAnchors.

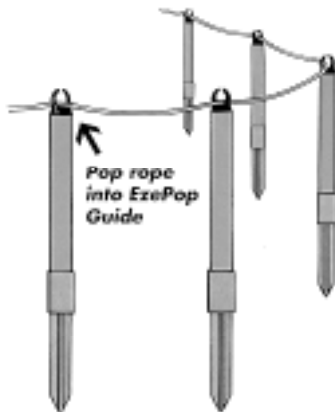

FlexFence

A cart proof marking system for paths and crowd control. No pins, studs or other protrusions that can be broken off by carts. For permanent or repeated use, set in FlexAnchors. FlexFence is the standard FlexStake post with the new EzePop rope guide.

Colors

Most stakes and anchors available in the following colors: Red, Yellow, Environmental Green, European Blue, and White.



1-800-942-0448